

Stainless steel insertion probe, t-handle

GTF 40

Introduction

Extra robust stainless steel T-handle penetration probe.
Especially for measuring in hay and straw bales or similar bulk goods like wood chips and grain.

Type K and Pt 1000 versions in different lengths are available.


The laser welded ergonomical T-handle enables the user to apply high force to insert the probe into heavily compressed bales.

The robust tip gives the best solution concerning measurement reaction time and robustness.



View product on our website

prod.senseca.apprunner.info/en/product/gtf-40-gtf-40?_dc=1784540952012

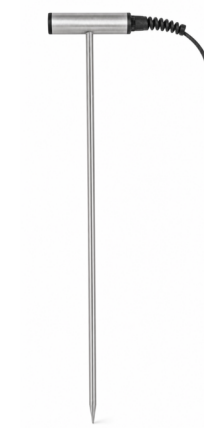

Ergonomic T-handle

Laser welded extra robust handle for comfortable insertion even in pressed bales.



Massive tip

Milled tip with optimum balance between robustness and sharpness.



Choice of probe length

Wide variety of different lengths to choose between mobility and deep measurements, starting at 62 cm, up to 250 cm

Features


Pt1000 and Thermocouple Variants

All significant principles supported: Pt1000 with BNC connector for high precision compact ECO 120 meters or thermocouples type K for ECO 130 or PRO 131/135.


Laserwelded construction

Ultimate strength and durability due to high class laserwelding of involved components (handle -shaft -tip).

Details

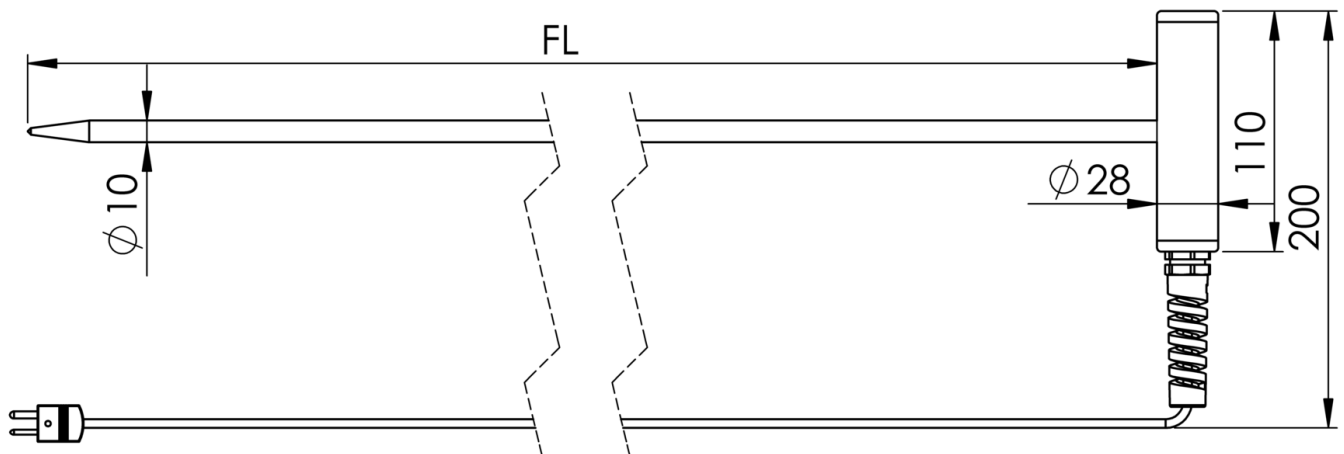

Type K version

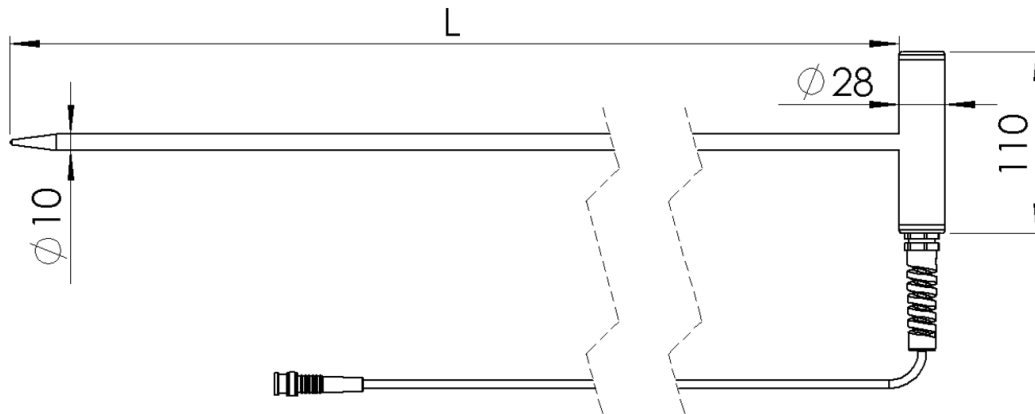

BNC Pt1000 version