

Sheathed thermocouple type K

GTT

Introduction

Sheathed thermocouple type K (NiCr-Ni) in different configurations. With standard mini flat pin connector, bendable, high temperature Inconel up to 1150 °C. For universal use, easy to be extended with type K extension cable.

Wide choice of diameters from 0.5 ... 6 mm, supporting standard lengths from 150 to 1500 mm.


max temp. connector: 200°C

Recommended max temperature of thin variants for permanent operation:

0.5 mm: 700°C

1.0 mm: 700°C

1.5 mm: 920°C

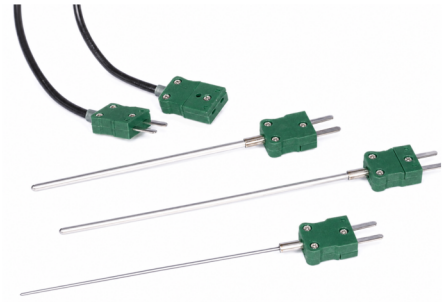

High temperature probe

Up to 1150°C with robust Inconel 600 jacket



Standard type K connector

Mini flat pin connector, normed size, distinctive polarity, compatible to ECO 130, PRO 131/135 and others



Bendable

For flexible adjustment to You're specific measurement challenge: Simply bend it to position.



View product on our website

prod.senseca.apprunner.info/en/product/gtt-gtt?_dc=1784555482893

Features

Choice of Diameter

Diameters of 0.5, 1.0, 1.5, 3.0, 6.0 are available

Choice of length

Length can be selected out of: 150, 250, 500, 1000, 1500 mm

Details

