

Flow transmitter LABOPLUS-HD2



- Robust industrial-grade flowmeter
- for use with viscous media (viscosity stabilized)
- High compressive strength (PN 200, optional PN500)
- No inlet and outlet sections required
- One analog output (10V or 20 mA switchable)
- One switching output
- IO-Link interface


Product description

The flow transmitters of the LABOPLUS-HD2 series work according to the principle of the spring-supported piston. A magnetically equipped piston is deflected by the flowing medium against the force of a spring. Deflection is a measure of flow rate. The position of the floating body is recorded outside the flow chamber with the help of magnetic field sensors.

The integrated electronics have an analog output and a switching output that alternatively can be used as a frequency output. In addition, it has an IO-Link interface, which enables digital communication with the sensor for configuration and to read out measured values.

Connection diagram

Connector M12 x 1 pin assignment

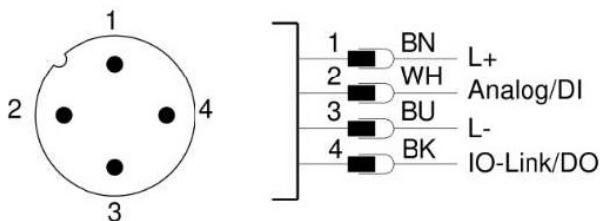

Specifications

| | | |
|-------------------------|--|---|
| Measuring principle | Spring-supported piston | |
| Nominal size | DN 8 ... DN 25 | |
| Mechanical connection | Female thread G ¼ ... G 1 (other connections on request) | |
| Measurement ranges | 0.5 ... 60 l/min (see table „Ranges and pressure loss“) | |
| Measurement uncertainty | ±3 % F.S. | |
| Media | Oils and other viscous media with viscosities in the range of 30 ... 330 mm ² /s | |
| Pressure loss | 1.1 ... 3.5 bar @ Q _{max} (see table) | |
| Compressive strength | PN 200 (PN 500 on request) | |
| Media temperature | -20 ... +85 °C optional -20 ... +150 °C (with spacers) | |
| Storage temperature | -20 ... +80 °C | |
| Materials (wetted) | <u>Brass version</u> | <u>Stainl. steel version</u> |
| | CW614N nickelled | 1.4571 |
| | CW614N | 1.4404 |
| | 1.4310 | 1.4310 |
| | Hard ferrite | Hart ferrite (PTFE coated) |
| | NBR | FKM |
| Supply voltage | 18 ... 30 V DC | |
| Current consumption | < 50 mA (SIO mode, unloaded outputs) | |
| IO-Link specification | IO-Link revision | V1.1.4 |
| | Bit rate | COM2 (38400 bit/s) |
| | Minimum cycle time | 20 ms |
| | SIO mode | yes |
| | Port class | A |
| | Block parameterization | yes |
| | Data storage | yes |
| Analog output | Current: | 4 ... 20 mA 0 ... 20 mA |
| | Voltage: | 0 ... 10 V 2 ... 10 V 0 ... 5 V 1 ... 5 V 0.5 ... 4.5 V |
| Switching output | transistor output push-pull, parameterizable as NPN o.C. Short-circuit and reverse polarity resistant I _{out} = 100 mA max per output | |
| | Configurable on the device as | |
| | <ul style="list-style-type: none"> • Limit switch • Frequency output • Pulse output • Signal output for preset counter | |
| Electr. connection | M12x1 circular connector, 4-pin | |
| Protection class | IP65 / IP67 | |
| Conformity | CE | |

Product information

LABOPLUS-HD2

Ranges and pressure loss

| Range l/min | Q _{max} l/min | Pressure loss bar @ Q _{max} Viscosity mm ² /s | | | | | Viscosity stability ±8%, min. |
|----------------|---------------------------|---|-----|-----|-----|-----|-------------------------------------|
| | | 30 | 60 | 100 | 205 | 330 | |
| 0.5 ... 8 | 12 | 1.1 | 1.4 | 1.6 | 2.8 | 3.5 | ±0.3 l/min |
| 1.5 ... 15 | 22 | 2.2 | 2.3 | 2.4 | 2.8 | 3.5 | ±0.5 l/min |
| 2.5 ... 25 | 35 | 1.9 | 2.0 | 2.1 | 2.3 | 2.9 | ±0.8 l/min |
| 6.0 ... 40 | 60 | 1.9 | 2.0 | 2.1 | 2.3 | 2.6 | ±2.7 l/min |
| 12.0 ... 60 | 80 | 2.1 | 2.3 | 2.4 | 2.6 | 2.8 | ±3.0 l/min |

Dimensions and weights

| | Type LABOPLUS- | G | X mm | AF | Weight appr. kg |
|--------------------|-------------------|-------|---------|----|--------------------|
| Brass | HD2-008GM | G 1/4 | 15 | 40 | 1.5 |
| | HD2-010GM | G 3/8 | | | |
| | HD2-015GM | G 1/2 | 18 | | 1.4 |
| | HD2-020GM | G 3/4 | | | |
| | HD2-025GM | G 1 | | | |
| Stainless steel | HD2-008GK | G 1/4 | 15 | 41 | 1.5 |
| | HD2-010GK | G 3/8 | | | |
| | HD2-015GK | G 1/2 | 18 | | 1.4 |
| | HD2-020GK | G 3/4 | | | |
| | HD2-025GK | G 1 | | | |

Order code


LABOPLUS-HD2 - 1. 2. 3. 4. 5. G

● = standard ○ = option

| | |
|---------------------------------|---|
| 1. Nominal size | |
| 008 | ● DN 08 |
| 010 | ● DN 10 |
| 015 | ● DN 15 |
| 020 | ● DN 20 |
| 025 | ● DN 25 |
| 2. Mechanical connection | |
| G | ● Female thread |
| 3. Housing material | |
| M | ● Brass |
| K | ● Stainless steel |
| 4. Measurement range | |
| 008 | ● 0.5 ... 8 l/min |
| 015 | ● 1.5 ... 15 l/min |
| 025 | ● 2.5 ... 25 l/min |
| 040 | ● 6.0 ... 40 l/min |
| 060 | ● 12.0 ... 60 l/min |
| 5. Option 1 | |
| H | ○ Extended temperature range 150 °C (with spacers) |

Accessories

Cable with circular connector M12x1 / 4-pin (not included)

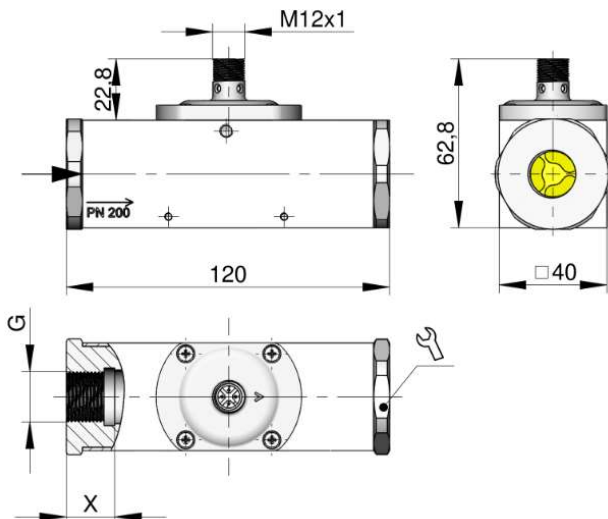

For the "Extended temperature range" option, PEEK spacers and mounting screws are used for thermal insulation of the body and electronics:

